


רוכר תג



SAVKLINGER

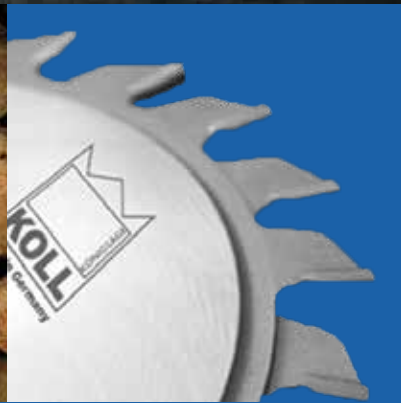

DRY-CUT KLINGE

METAL



Dry-Cut klinger til skæring i metal uden brug af kølemiddel.
Skiven har meget lang standtid og en fremragende skærekvalitet.

* Også til rustfrit stål (Varenr. 47 30525078 99 og 47 35525090 99).

| Diameter | Varenr. |  | Tænder | Lager |
|----------|----------------|---|--------|-------|
| 255 | 47 25525066 99 | 25,4 | Z66 | ✓ |
| 305 | 47 30525060 99 | 25,4 | Z60 | ✓ |
| 305 | 47 30525080 99 | 25,4 | Z80 | ✓ |
| 305 | 47 30525078 99 | 25,4 | Z78 | ✓ |
| 355 | 47 35526080 99 | 25,4 | Z80 | ✓ |
| 355 | 47 35525090 99 | 25,4 | Z90 | ✓ |

RUNDSAVSKLINGE

TRÆ / ALU



Rundsavsklinge til træ.



Rundsavsklinge til alu.



| Diameter | Varenr. | Materiale |  |  | Tænder | Lager |
|----------|----------------|---------------|---|--|------------|-------|
| 160 | 33 16020024 99 | Træ | 20 | 2,6 | 24 WZ | ✓ |
| 160 | 35 16020048 99 | Træ | 20 | 2,6 | 48 WZ | ✓ |
| 216 | 60 21630048 88 | Træ | 30 | 3,0 | 48 WZ neg | ✓ |
| 250 | 52 25030030 99 | Træ | 30 | 3,2 | 30 WZ | ✓ |
| 250 | 53 25035042 88 | Træ | 30 | 3,2 | 42 WZ | ✓ |
| 250 | 55 25030060 99 | Træ | 30 | 3,2 | 60 WZ | ✓ |
| 160 | 34 16020042 99 | Laminat / Alu | 20 | 2,6 | 42 FTZ neg | ✓ |
| 216 | 79 21630048 88 | Alu | 30 | 3,2 | 48 FTZ neg | ✓ |
| 250 | 79 25030060 87 | Alu | 30 | 3,2 | 60 FTZ neg | ✓ |

+GF+ KLINGE HSS-E

STÅL / RUSTFRIT STÅL



Klinger til +GF+ save.
HSS-E. Tysk kvalitet.



| Diameter | Varenr. |  |  | Tænder | Lager |
|----------|---------------------|---|---|--------|-------|
| 63 | 1838BW63x1,60x16Z44 | 16 | 1,6 | Z44 | ✓ |
| 63 | 1838BW63x1,60x16Z64 | 16 | 1,6 | Z64 | ✓ |
| 63 | 1838BW63x1,60x16Z80 | 16 | 1,6 | Z80 | ✓ |
| 68 | 1838BW68x1,60x16Z64 | 16 | 1,6 | Z64 | ✓ |
| 68 | 1838BW68x1,60x16Z84 | 16 | 1,6 | Z84 | ✓ |
| 80 | 1838BW80x1,60x16Z84 | 16 | 1,6 | Z84 | ✓ |

+GF+ KLINGE HSS-E TIALN

STÅL / RUSTFRIT STÅL / DUPLEX



Klinger til +GF+ save.
HSS-E. Tysk kvalitet.
Til svært bearbejdlige materialer (Duplex etc.).

| Diameter | Varenr. |  |  | Tænder | Lager |
|----------|-------------|---|---|--------|-------|
| 63 | GF6364TIALN | 16 | 1,6 | Z64 | ✓ |
| 68 | GF6864TIALN | 16 | 1,6 | Z64 | ✓ |
| 80 | GF8084TIALN | 16 | 1,6 | Z84 | ✓ |

MULTICUT KLINGE M42

BI-METAL

Bandsavsklinger leveres direkte fra lager i Tyskland
Leveringstid: ca. 1 uge



Universal bandsavklinge M42 til alle materialer <math><1.400 \text{ N/mm}^2</math>. Robust bandsavklinge med høj levetid og lavt støjniveau pga. reducerede vibrationer.

| Varenr. | Dimension | Tandform | Spånvinkel | Pakkeenhed | Lager |
|----------------------|-----------------|----------|------------|------------|-------|
| 17280130601100-01138 | 1138x13x0,60 mm | 10/14 N | 0° | 5 | ✓ |
| 17280130608200-01138 | 1138x13x0,60 mm | 8/12 N | 0° | 5 | ✓ |
| 17280130601100-01140 | 1140x13x0,60 mm | 10/14 N | 0° | 5 | ✓ |
| 17280130608200-01140 | 1140x13x0,60 mm | 8/12 N | 0° | 5 | ✓ |
| 17280130601100-01325 | 1325x13x0,60 mm | 10/14 N | 0° | 5 | ✓ |
| 17280130608200-01325 | 1325x13x0,60 mm | 8/12 N | 0° | 5 | ✓ |
| 17280130601100-01330 | 1330x13x0,60 mm | 10/14 N | 0° | 5 | ✓ |
| 17280130608200-01330 | 1330x13x0,60 mm | 8/12 N | 0° | 5 | ✓ |
| 17280130601100-01335 | 1335x13x0,60 mm | 10/14 N | 0° | 5 | ✓ |
| 17280130608200-01335 | 1335x13x0,60 mm | 8/12 N | 0° | 5 | ✓ |
| 17280130601100-01440 | 1440x13x0,60 mm | 10/14 N | 0° | 5 | ✓ |
| 17280130606100-01440 | 1440x13x0,60 mm | 6/10 N | 0° | 5 | ✓ |
| 17280130608200-01440 | 1440x13x0,60 mm | 8/12 N | 0° | 5 | ✓ |
| 17280130601100-01470 | 1470x13x0,60 mm | 10/14 N | 0° | 5 | ✓ |
| 17280130601100-01638 | 1638x13x0,60 mm | 10/14 N | 0° | 5 | ✓ |
| 17280130606100-01638 | 1638x13x0,60 mm | 6/10 N | 0° | 5 | ✓ |
| 17280130608200-01638 | 1638x13x0,60 mm | 8/12 N | 0° | 5 | ✓ |
| 17280130601100-01735 | 1735x13x0,60 mm | 10/14 N | 0° | 5 | ✓ |
| 17280130901100-01735 | 1735x13x0,90 mm | 10/14 N | 0° | 5 | ✓ |
| 17280130906100-01735 | 1735x13x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17280200901100-02080 | 2080x20x0,90 mm | 10/14 N | 0° | 5 | ✓ |
| 17280200906100-02080 | 2080x20x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17280200901100-02085 | 2085x20x0,90 mm | 10/14 N | 0° | 5 | ✓ |
| 17280200906100-02085 | 2085x20x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17280270901100-02450 | 2450x27x0,90 mm | 10/14 N | 0° | 5 | ✓ |
| 17290270904600-02450 | 2450x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-02450 | 2450x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270906100-02450 | 2450x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17280270908200-02450 | 2450x27x0,90 mm | 8/12 N | 0° | 5 | ✓ |
| 17280270901100-02465 | 2465x27x0,90 mm | 10/14 N | 0° | 5 | ✓ |
| 17280270905800-02465 | 2465x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270906100-02465 | 2465x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17280270901100-02470 | 2470x27x0,90 mm | 10/14 N | 0° | 5 | ✓ |
| 17280270905800-02470 | 2470x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270906100-02470 | 2470x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17280270901100-02480 | 2480x27x0,90 mm | 10/14 N | 0° | 5 | ✓ |
| 17280270905800-02480 | 2480x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |

| Varenr. | Dimension | Tandform | Spånvinkel | Pakkeenhed | Lager |
|----------------------|-----------------|----------|------------|------------|-------|
| 17280270906100-02480 | 2480x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17280270905800-02700 | 2700x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270906100-02700 | 2700x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17290270904600-02710 | 2710x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-02710 | 2710x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17290270904600-02720 | 2720x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-02720 | 2720x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17290270904600-02750 | 2750x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-02750 | 2750x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270906100-02750 | 2750x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17290270904600-02755 | 2755x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-02755 | 2755x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270906100-02755 | 2755x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17290270904600-02760 | 2760x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-02760 | 2760x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270906100-02760 | 2760x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17280270905800-02765 | 2765x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270906100-02765 | 2765x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17290270904600-02825 | 2825x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-02825 | 2825x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17290270904600-02835 | 2835x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-02835 | 2835x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17290270903400-02910 | 2910x27x0,90 mm | 3/4 K | 10° | 5 | ✓ |
| 17290270904600-02910 | 2910x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-02910 | 2910x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270906100-02910 | 2910x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17280270908200-02910 | 2910x27x0,90 mm | 8/12 N | 0° | 5 | ✓ |
| 17280270905800-02925 | 2925x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17290270904600-02950 | 2950x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-02950 | 2950x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270906100-02950 | 2950x27x0,90 mm | 6/10 N | 0° | 5 | ✓ |
| 17280270908200-02950 | 2950x27x0,90 mm | 8/12 N | 0° | 5 | ✓ |
| 17290270904600-03010 | 3010x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-03010 | 3010x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17280270905800-03120 | 3120x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17290270904600-03150 | 3150x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-03150 | 3150x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17290270903400-03180 | 3180x27x0,90 mm | 3/4 K | 10° | 5 | ✓ |
| 17290270904600-03180 | 3180x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17290270904600-03280 | 3280x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17290270904600-03320 | 3320x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-03320 | 3320x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17290270904600-03370 | 3370x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-03370 | 3370x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17290270904600-03375 | 3375x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-03375 | 3375x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |
| 17290270904600-03660 | 3660x27x0,90 mm | 4/6 K | 10° | 5 | ✓ |
| 17280270905800-03660 | 3660x27x0,90 mm | 5/8 N | 0° | 5 | ✓ |

